

# ANE、ANE-H SERIES

## ANE、ANE-H 系列



5 Years Warranty



光控感应头  
Optical control sensor head

### 非隔离-三合一调光无频闪-户外驱动

Non-isolation-three in one dimming no stroboscopic  
-Outdoor drive

- ▶ 输入电压/Input Voltage: ANE=100-277Vac; ANE-H=120-347Vac
- ▶ 输入频率/Input Frequency: 50/60Hz
- ▶ 雷击浪涌/Surge Protection: 6KV/10KV (6KV/6KV)
- ▶ 电流可调节/Current adjustable
- ▶ 选配功能/Optional function:

- I : 三合一隔离调光(0-10V/PWM/Resistor), 0V可关断/  
Three-in-one isolation dimming (0-10V/PWM/Resistor), 0V can be turned off
- II : 12V-200mA独立辅助源/12V-200mA Independent auxiliary source
- III : 光控/Optical control
- IV : 可外接调功率、调色温/  
External power supply, color temperature


### 产品功率 Product power

30W 45W 60W 80W


### 应用灯具 Application luminaire

户外照明, 工业照明, 体育照明  
Outdoor lighting, industrial lighting, Sports lighting


### 产品尺寸 Product Size

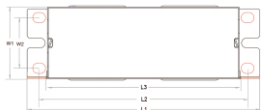



Model NO.	L1	L2	L3	L4	W1	W2	H
45W	120	107.5	100	112	38	26	26
60W	155	142	132	142	38	26	30

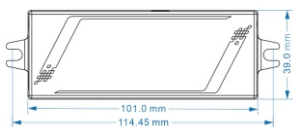

30W

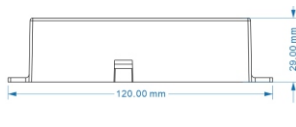

单位/Unit: mm

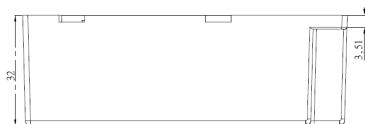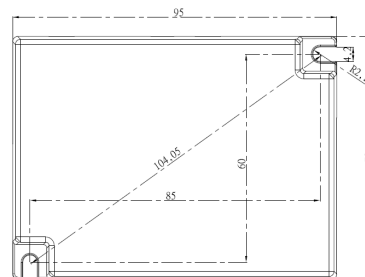

80W

### 型号参数列表 Model Parameter List

产品型号 Product Model	输出功率 PO	输出电压 Vout	输出电流 Lout	功率因素 PF	效率(@230V) Efficiency(@230V)	雷击浪涌 Surge Protection	外壳尺寸 (mm) dimensions (mm)
ANE-045#-030-XV* 单极低频闪	30W	90-130V	0.09-0.27A	≥0.90	≥87%	4KV/4KV	L120XW39XH29
ANE-045#-050-XV* 单极低频闪	45W	90-130V	0.2-0.5A	≥0.90	≥88%	4KV/4KV	L120XW38XH26
ANE-060#-060-XV* 单极低频闪	60W	90-130V	0.4-0.6A	≥0.90	≥90%	6KV/6KV	L155XW38XH30
ANE-078#-062-XV*	80W	90-130V	0.4-0.62A	≥0.90	≥87%	4KV/4KV	L95XW70XH32