

CSP INTELLIGENT CONTROL SERIES

CSP 智能控制系列



三合一调光-无频闪-智能控制电源

Three in one dimming - no stroboscope - Intelligent control power supply

- ▶ 输入电压/Input Voltage: 100-277Vac; CSP-H=120-347Vac
- ▶ 输入频率/Input Frequency: 50/60Hz
- ▶ 恒压、恒流/Constant pressure, constant current
- ▶ 选配3-12V辅助电路/Optional : 3-12V auxiliary circuit
- ▶ 功能配置/Function configuration:
 - I : WIFI蓝牙模块/WIFI bluetooth module
 - II : 2.4G模块/2.4G module
 - III : 红外控制, DMX512控制/Infrared control, DMX512 control
 - IV : RGBW智能调光调色, 可手机APP控制/
RGBW intelligent dimming color, can be controlled by mobile phone APP

产品功率 Product power


15W 28W 45W 48W

应用灯具 Application luminaire

智能家居, 商业照明, 景观照明
Smart home, commercial lighting,
Landscape lighting

产品尺寸 Product Size

单位/Unit:mm

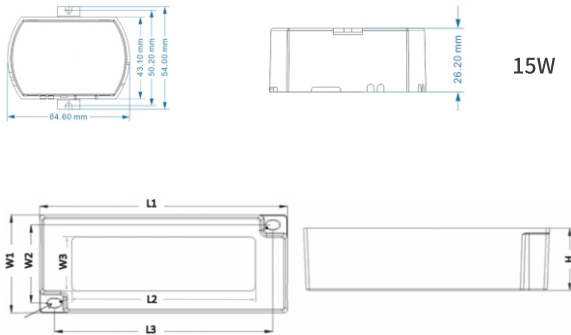

Model NO.	L1	L2	L3	W1	W2	W3	H
28W	80	/	71.5	36	30	/	23.2
45W	90	65	79.93	48	39.4	26	27.5

型号参数列表 Model Parameter List

产品型号 Product Model	输出功率 PO	输出电压 Vout	输出电流 Lout	功率因素 PF	效率(@230V) Efficiency(@230V)	雷击浪涌 Surge Protection	外壳尺寸(mm) dimensions (mm)
NE015040YYY-XG	15W	21-40V	450mA	≥0.90	≥84%	4KV	L64.6XW54XH26.2
SP-025H-YYY-XV*	15W	21-40V	450mA	≥0.90	≥84%	4KV	L64.6XW54XH26.2
SP025040YYY-XG*	28W	18-40V	700mA	≥0.90	≥85%	/	L80XW36XH23.2
NE045040YYY-XG	45W	21-40V	1A	≥0.90	≥86%	4KV	L90XW48XH27.5
SP-036H-YYY-XV*	45W	21-51V	1.25A	≥0.90	≥86%	4KV	L90XW48XH27.5
SP-048#-YYY-XV*	48W	21-51V	1.25A	≥0.90	≥84%	2KV	L334XW30XH23

Model SP-048#, #=L is 100-277Vac; #=H is 120-347Vac