



ECV-T Constant voltage SERIES

ECV-T恒压系列



超薄系列-镜子灯驱动

Ultra-thin series - Mirror lamp drive

- ▶ 输入电压/Input Voltage: 100-277Vac
- ▶ 输入频率/Input Frequency: 50/60Hz
- ▶ 保护种类: 过负载, 过温
Protection type: Overload, overtemperature
- ▶ 功能配置/Function configuration:
 - I :除雾功能/Fog removal function
 - II : 三档/五档调色温 Three speed/Five speed color temperature

产品功率 Product power


24W 36W 48W
60W 72W 96W

应用灯具 Application luminaire

室内家居、商业照明
Indoor household、commercial lighting

产品尺寸 Product Size

单位/Unit:mm

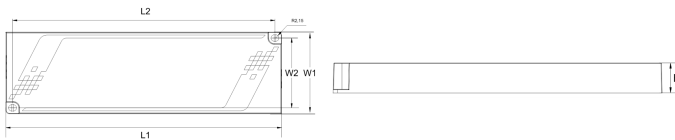

Model NO.	L1	L2	W1	W2	H
72W	195	186	57	49	16.5
96W	195	186	57	49	16.5

型号参数列表 Model Parameter List

产品型号 Product Model	输出功率 PO	输出电压 Vout	输出电流 Lout	功率因素 PF	效率 Efficiency	外壳尺寸 (mm) dimensions (mm)
ECV-024T-VVV-XV	24W	12V/24V/36V/48V	2-0.5A	/	≥87%	L102XW43.5XH16.5
ECV-036T-VVV-XV*	36W	12V/24V/36V/48V	3-0.75A	/	≥87%	L120XW53XH16.5
ECV-048T-VVV-XV*	48W	12V/24V/36V/48V	4-1A	/	≥87%	L120XW53XH16.5
ECV-060T-VVV-XV*	60W	12V/24V/36V/48V	5-1.25A	/	≥87%	L165XW58XH16.5
ECV-072H-VVV-XV*	72W	12V/24V/36V/48V	6-1.5A	≥0.90	≥87%	L195XW57XH16.5
ECV-096H-VVV-XV*	96W	12V/24V/36V/48V	8-2A	≥0.90	≥87%	L195XW57XH16.5