



HNE SERIES

HNE系列



隔离-三合一调光-无频闪户外驱动

isolation-three in one dimming-stroboscopic Outdo or drive

- ▶ 输入电压/Input Voltage: BNE=100-277Vac
- ▶ 输入频率/Input Frequency: 50/60Hz
- ▶ 雷击浪涌/Surge Protection: 6KV/10KV
- ▶ 防水等级/Waterprooflevel : IP67
- ▶ 电流可调节/Current adjustable
- ▶ 功能配置/Function configuration:
 - I : 三合一隔离调光(0-10V/PWM/Resistor),0V可关断/
Three-in-one isolation dimming (0-10V/PWM/Resistor),0V can be turned off
 - II : 12V - 200mA独立辅助源/
12V-200mA Independent auxiliary source

产品功率 Product power

60W 120W 150W 200W 240W


应用灯具 Application luminaire

植物照明, 路灯, 隧道灯, 工矿灯, 停车场, 商业照明
Plant lighting, Street lamp, Tunnel lamp, Industrial and mining, Parking garages, commercial lighting



产品尺寸 Product Size

单位/Unit: mm

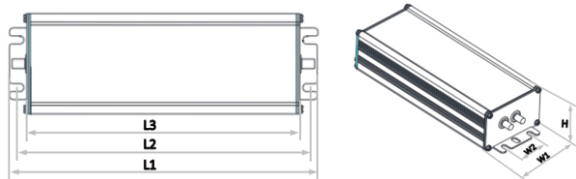

Model NO.	L1	L2	L3	W1	W2	H
60W	160	/	153.2	50	/	33.5
120W	186	/	179.2	50	/	33.5
150W	182	169	156	68	30	36
200W	218	205	192	68	30	36
240W	242	229	216	68	30	36



型号参数列表 Model Parameter List

产品型号 Product Model	输出功率 PO	输出电压 Vout	输出电流 Lout	功率因素 PF	效率(@230V) Efficiency(@230V)	雷击浪涌 Surge Protection	外壳尺寸 (mm) dimensions (mm)
HNE-60-YYY-XXG*	60W	27-56V	1-1.7A	≥0.90	≥92%	6KV/6KV	L160XW50XH33.5
HNE-120-YYY-XXG*	120W	27-56V	2-3.4A	≥0.90	≥92%	6KV/6KV	L186XW50XH33.5
HNE-150-56-XXG	150W	27-56V	2-4.2A	≥0.90	≥92%	6KV/10KV	L182XW68XH36
HNE-200-56-XXG	200W	27-56V	2.8-5.6A	≥0.90	≥92%	6KV/10KV	L218XW68XH36
HNE-240-56-XXG	240W	27-56V	3.35-6.7A	≥0.90	≥92%	6KV/10KV	L242XW68XH36