

IS SERIES

IS系列



隔离-PFC恒流-防水驱动

Isolation- PFC constant current-waterproof drive

NEW 5W超小体积, 适用于COB灯具/
5W super small size, suitable for COB lamps

- ▶ 输入电压/Input Voltage: 100-277Vac
- ▶ 输入频率/Input Frequency: 50/60Hz
- ▶ 雷击浪涌/Surge Protection: 2KV(4KV; 6KV可选)
- ▶ 功能配置/Function configuration: 光控/Optical control


产品功率 Product power

5W 15W 16W
25W 28W 40W 60W

应用灯具 Application luminaire

室外道路照明、建筑照明、停车场、商业照明
Outdoor street and area lighting, Architectural lighting, Parking garages, commercial lighting

产品尺寸 Product Size

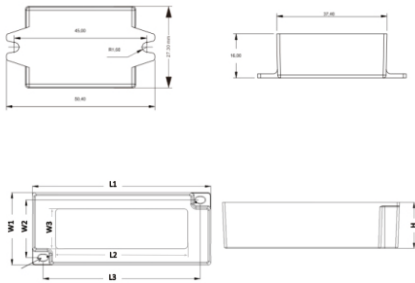

单位/Unit: mm

Model NO.	L1	L2	L3	W	H
5W	50.5	45	37.5	27.5	16

Model NO.	L1	L2	L3	W1	W2	W3	H
15W	66	/	57.5	33.8	27.5	/	21.3
25W/28W	80	/	71.5	36	30	/	23.2
40W	113	83.99	102	47	39.4	26	30
60W	138	/	128.1	47	38	/	32

型号参数列表 Model Parameter List

产品型号 Product Model	输出功率 PO	输出电压 Vout	输出电流 Lout	功率因素 PF	效率(@230V) Efficiency(@230V)	雷击浪涌 Surge Protection	外壳尺寸 (mm) dimensions (mm)
IS007VVYYY-XG	5W	3-40V	650mA	≥0.90	≥75%	/	L50.5(37.5)XW27.5XH16.5
IS012038YYY-XG	15W	12-40V	350mA	≥0.90	≥85%	2KV	L66XW33.8XH21.3
IS025038YYY-XG	16W	21-40V	400mA	≥0.90	≥85%	2KV	L65XW53XH27
IS025038ZZZ-XG	25W	21-40V	580mA	≥0.90	≥86%	2KV	L80XW36XH23
SP025040YYY-XG*	28W	18-40V	700mA	≥0.90	≥85%	/	L80XW36XH23.2
IS032038YYY-9G	40W	21-40V	1A	≥0.90	≥88%	2KV/4KV/6KV	L113.6XW47XH30
IS060038YYY-1G	60W	21-40V	1.5A	≥0.90	≥87%	6KV	L138XW47XH32mm