

NIS-D SERIES

NIS-D系列



非隔离-三合一调光-户外驱动
Non-isolation-three in one dimming-Outdoor drive

- ▶ 输入电压/Input Voltage: 100-277Vac
- ▶ 输入频率/Input Frequency: 50/60Hz
- ▶ 雷击浪涌/Surge Protection: 6KV/6KV
- ▶ 频闪率小于 30% / The stroboscopic rate is less than 30%
- ▶ 选配功能/Optional function:
 - I : 三合一隔离调光(0-10V/PWM/Resistor), 0V可关断/
Three-in-one isolation dimming (0-10V/PWM/Resistor), 0V can be turned off
 - II : 12V-200mA独立辅助源/12V-200mA Independent auxiliary source
 - III : 光控/Optical control
 - IV : 可外接调功率、调色温/
External power supply, color temperature

产品功率 Product power


30W 45W 55W 75W 85W

应用灯具 Application luminaire

户外照明, 植物照明, 工业照明, 体育照明
Outdoor lighting, Plant lighting, industrial lighting, Sports lighting

产品尺寸 Product Size

单位/Unit:mm

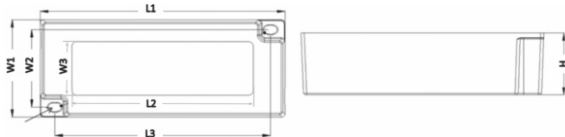

Model NO.	L1	L2	L3	L4	W1	W2	H
30W	80	/	71.5	36	30	/	23.2
45W	90	65	80	48	40	26	27.5
55W	113	84	102	47	40	26	30
75W	138	/	128.1	47	38	/	32
85W	138	/	128.1	47	38	/	32

型号参数列表 Model Parameter List

产品型号 Product Model	输出功率 PO	输出电压 Vout	输出电流 Lout	功率因素 PF	效率(@230V) Efficiency(@230V)	雷击浪涌 Surge Protection	外壳尺寸(mm) dimensions (mm)
IS030062YYY-*×#	30W	36-62V	480mA	≥0.90	≥89%	4KV	L80XW36XH23.2
IS045062YYY-WXF	45W	36-62V	0.65A	≥0.90	≥88%	6KV	L90XW48XH27.5
IS060062YYY-WXF	55W	36-62V	0.9A	≥0.90	≥90%	6KV	L113.6XW47XH30
IS080062YYY-WXF	75W	36-62V	1.2A	≥0.90	≥90%	6KV/6KV	L138XW47XH32
IS080062YYY-WXF	85W	36-62V	1.35A	≥0.90	≥90%	6KV/6KV	L138XW47XH32