



ECV Constant voltage SERIES

ECV 恒压系列



恒压驱动 Constant voltage drive

- ▶ 输入电压/Input Voltage: 100-277Vac
- ▶ 输入频率/Input Frequency: 50/60Hz
- ▶ 保护种类: 过负载, 过温
Protection type: Overload, overtemperature

产品功率 Product power


12W 24W 36W
48W 60W 72W 96W

应用灯具 Application luminaire

室内家居、商业照明
Indoor household、commercial lighting

产品尺寸 Product Size

单位/Unit: mm

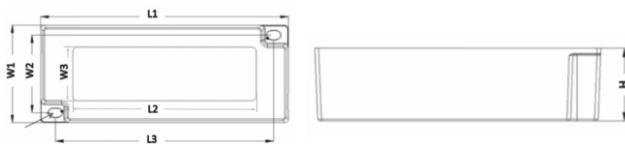

Model NO.	L1	L2	L3	W1	W2	W3	H
12W	66	/	57.5	33.8	27.5	/	21.3
24W	80	/	71.5	36	30	/	23.2
36W	90	65	79.93	48	39.4	26	27.5
48W	90	65	79.93	48	39.4	26	27.5
60W	113	84	102	47	40	26	30
72W	113	84	102	47	40	26	30
96W	138	/	128.1	47	38	/	32

型号参数列表 Model Parameter List

产品型号 Product Model	输出功率 PO	输出电压 Vout	输出电流 Lout	功率因素 PF	效率 Efficiency	外壳尺寸 (mm) dimensions (mm)
ECV-012P-VV-VX*	12W	12V/24V	1A/0.5A	/	≥80%	L66XW33.8XH21.3
ECV-024P-VV-VX*	24W	12V/24V	2A/1A	/	≥83%	L80XW36XH23.2
ECV-036P-VV-VX*	36W	12V/24V	3A/1.5A	/	≥86%	L90XW48XH27.5
ECV-048P-VV-VX*	48W	12V/24V	4A/2A	/	≥85%	L90XW48XH27.5
ECV-060P-VV-VX*	60W	12V/24V/36V/48V	5-1.25A	/	≥85%	L113.6XW47XH30
ECV-072P-VV-VX*	72W	12V/24V/36V/48V	6-1.5A	/	≥85%	L113.6XW47XH30
ECV-096H-VV-VX*	96W	12V/24V/36V/48V	8-2A	≥0.90	≥87%	L138XW47XH32